



zinc  it[®]
Alum
anodes

www.zinc-it.eu



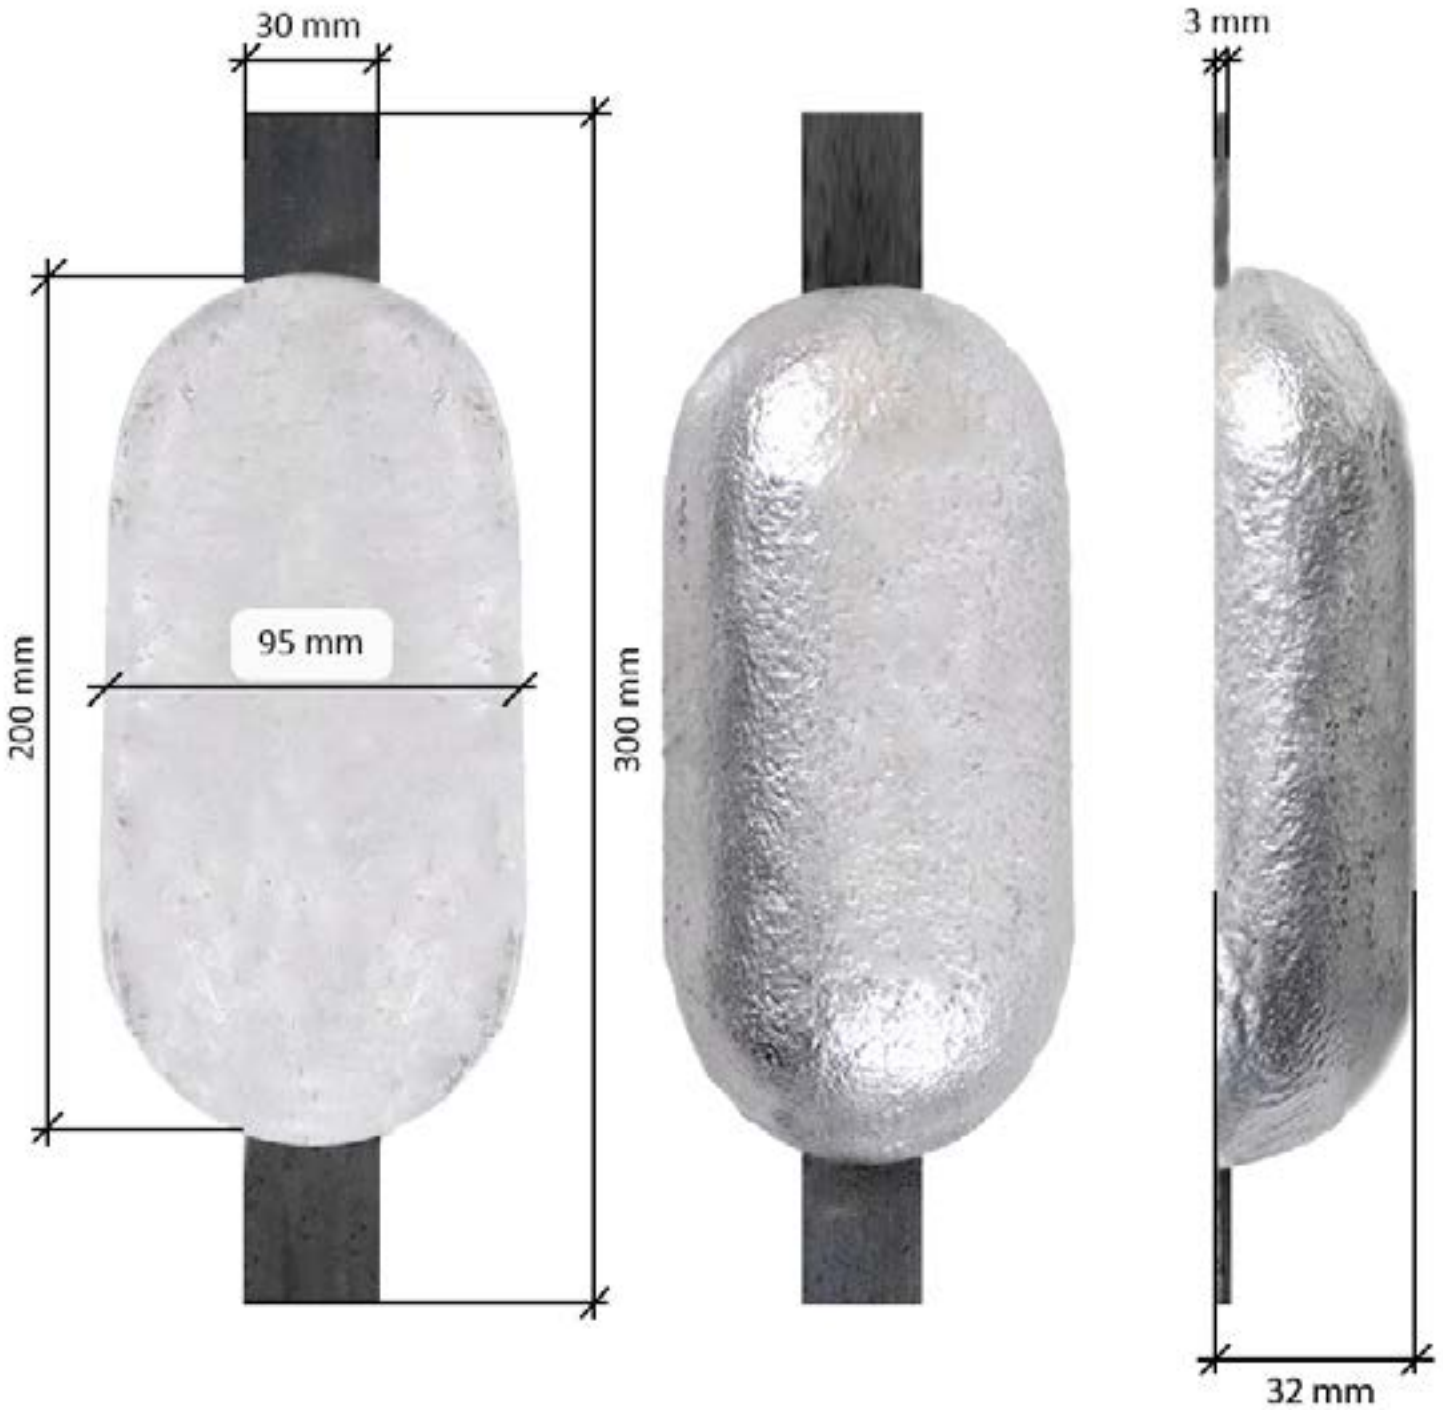


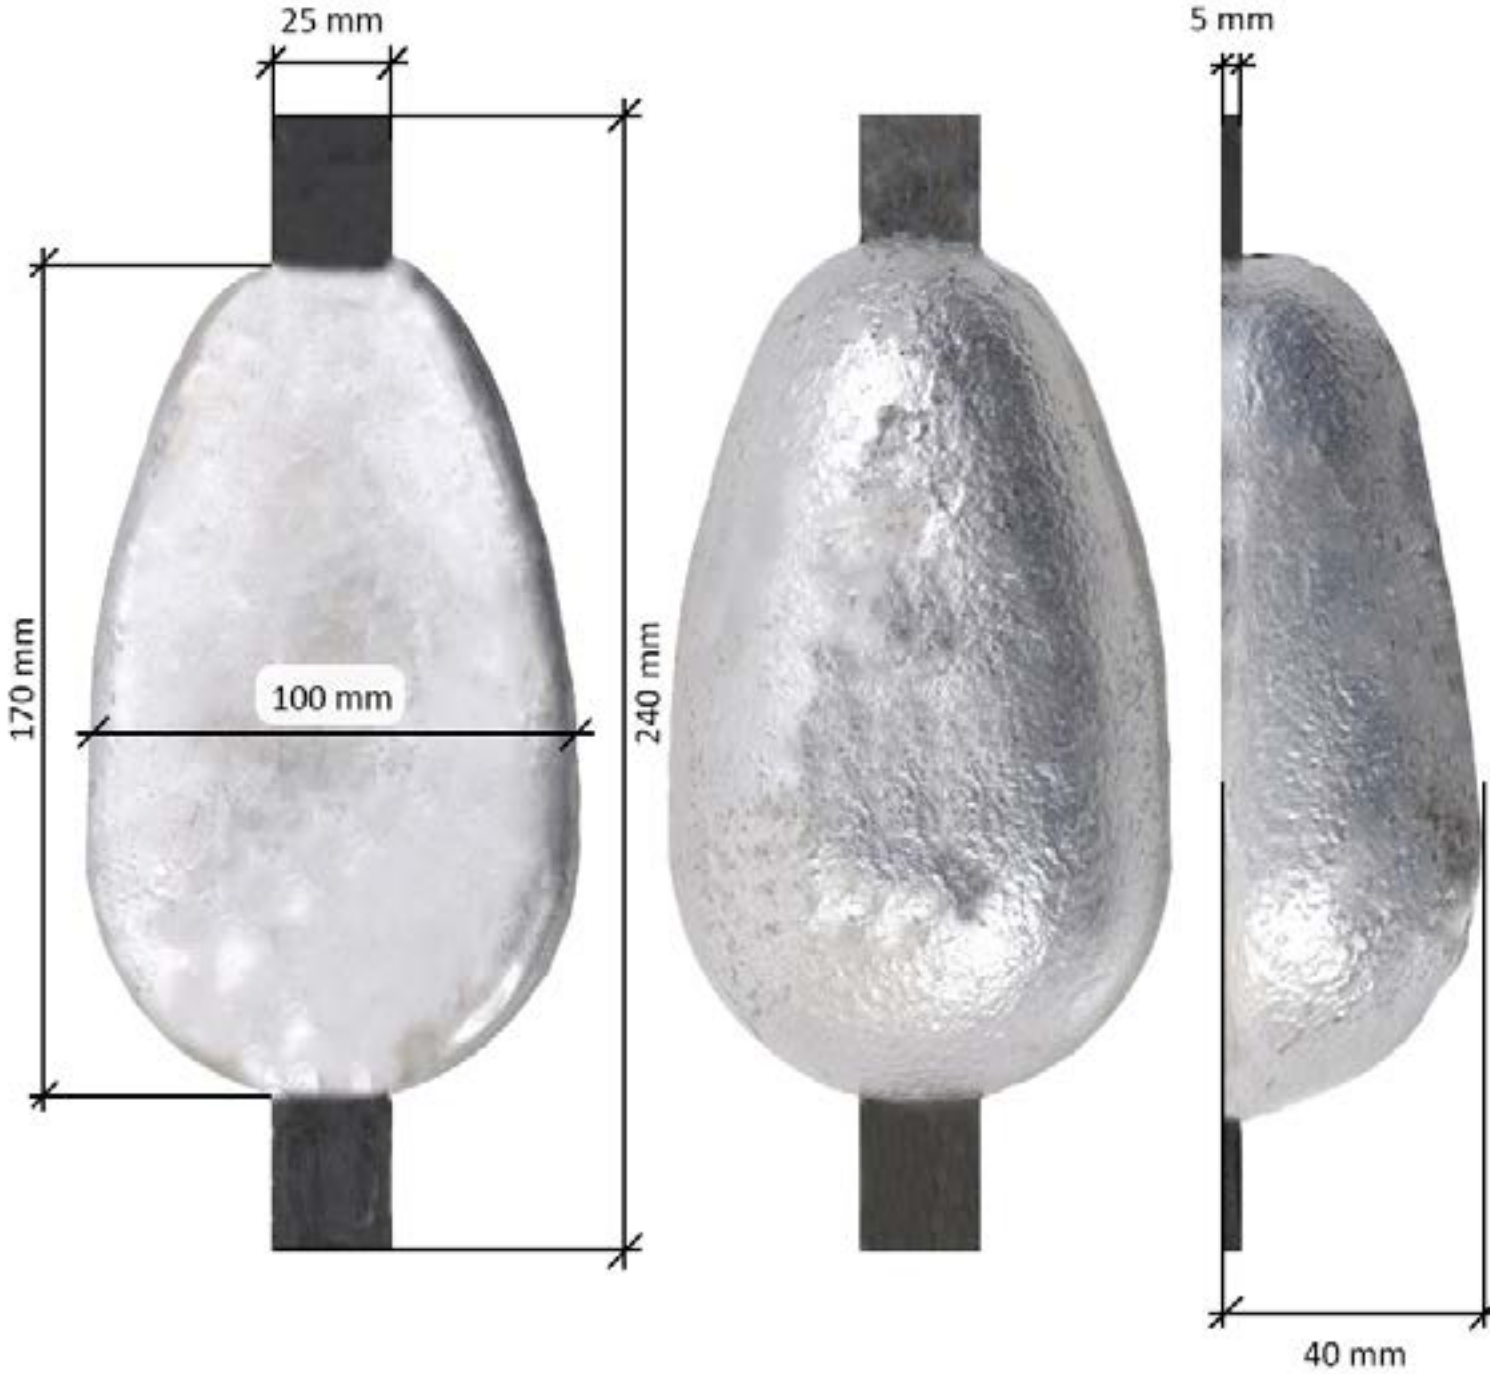


Type	Weight
W130	3,20 Kg




Type	Weight
W111	5,00 Kg

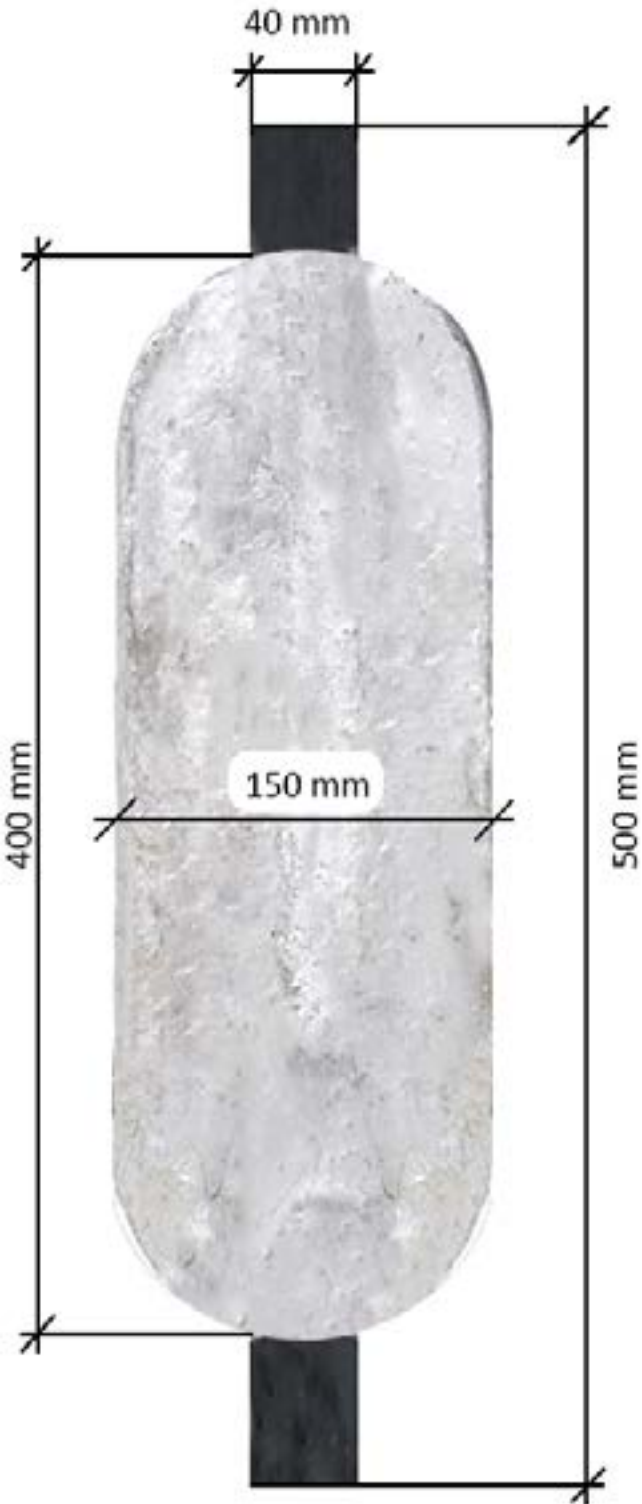

Type	Weight
N80AH	8,00 Kg

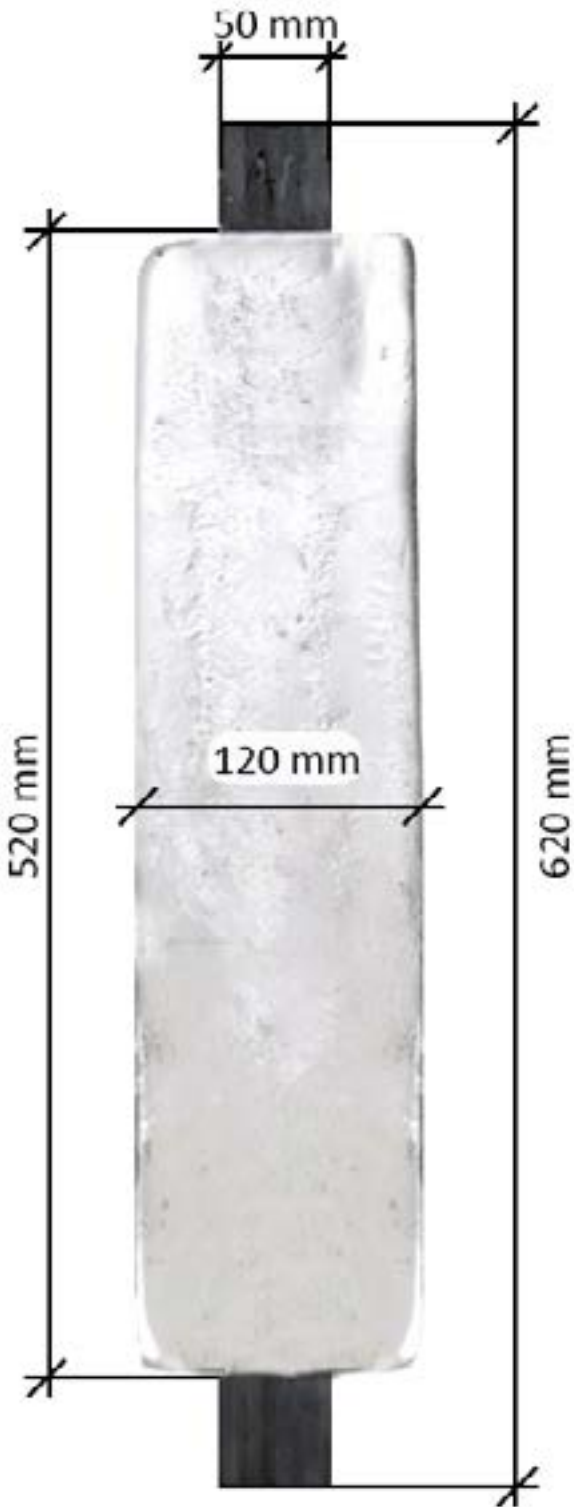


Type	Weight
W114	9,20 Kg

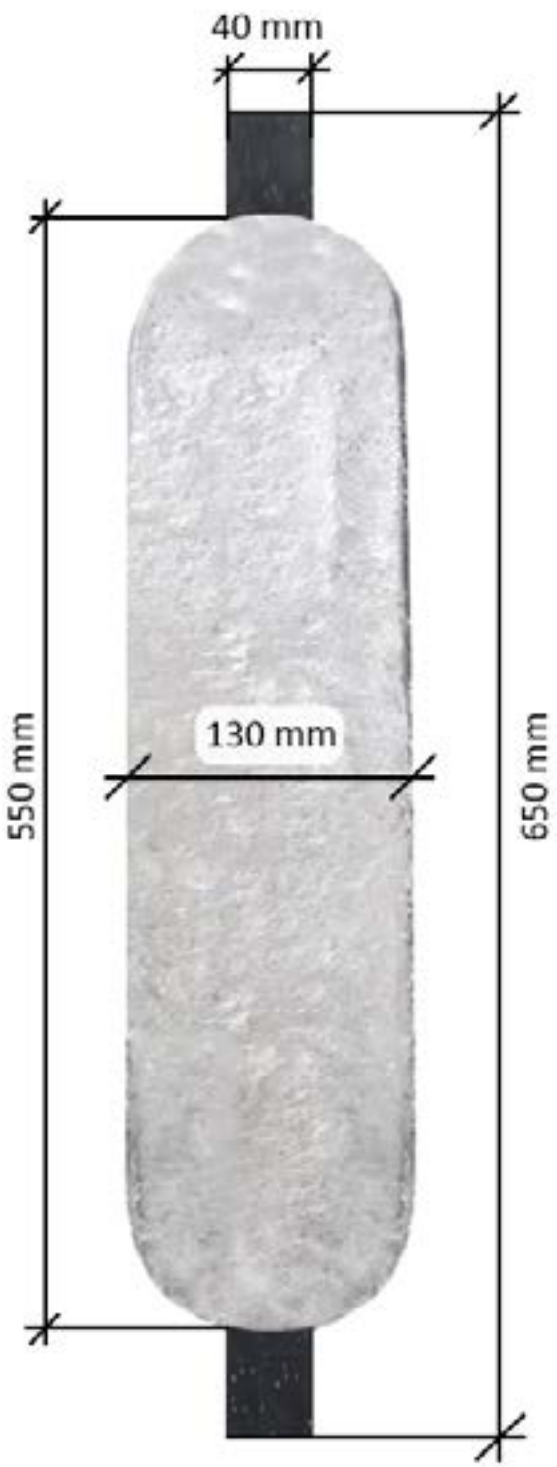





Type	Weight
N150AH	15,00 Kg

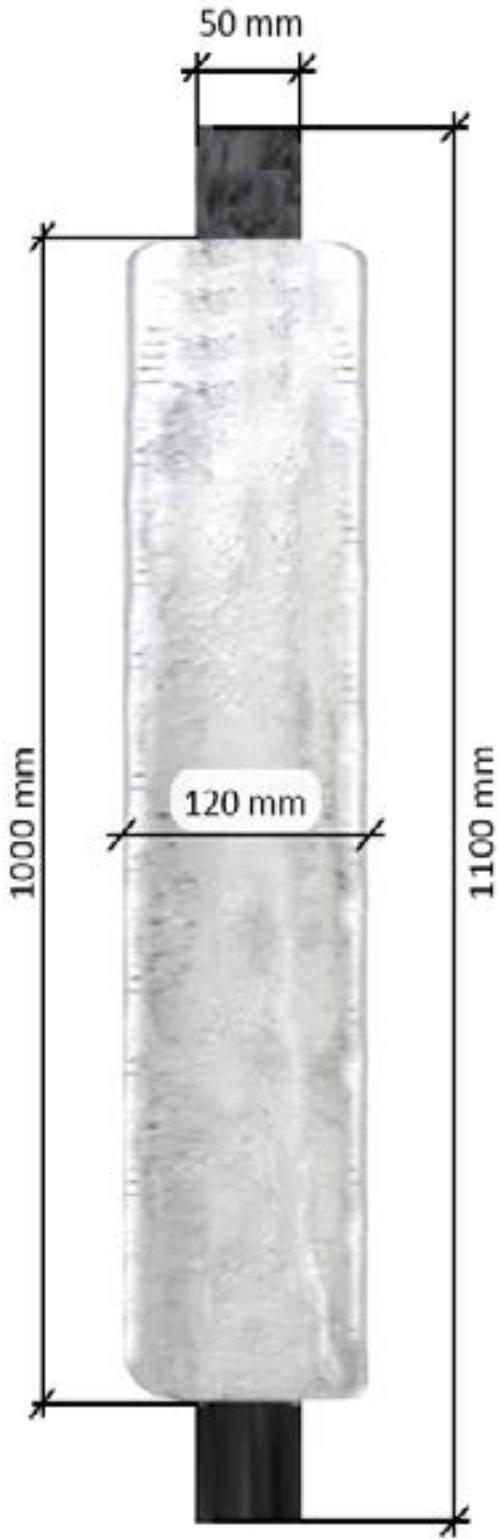


Type	Weight
W124	15,40 Kg

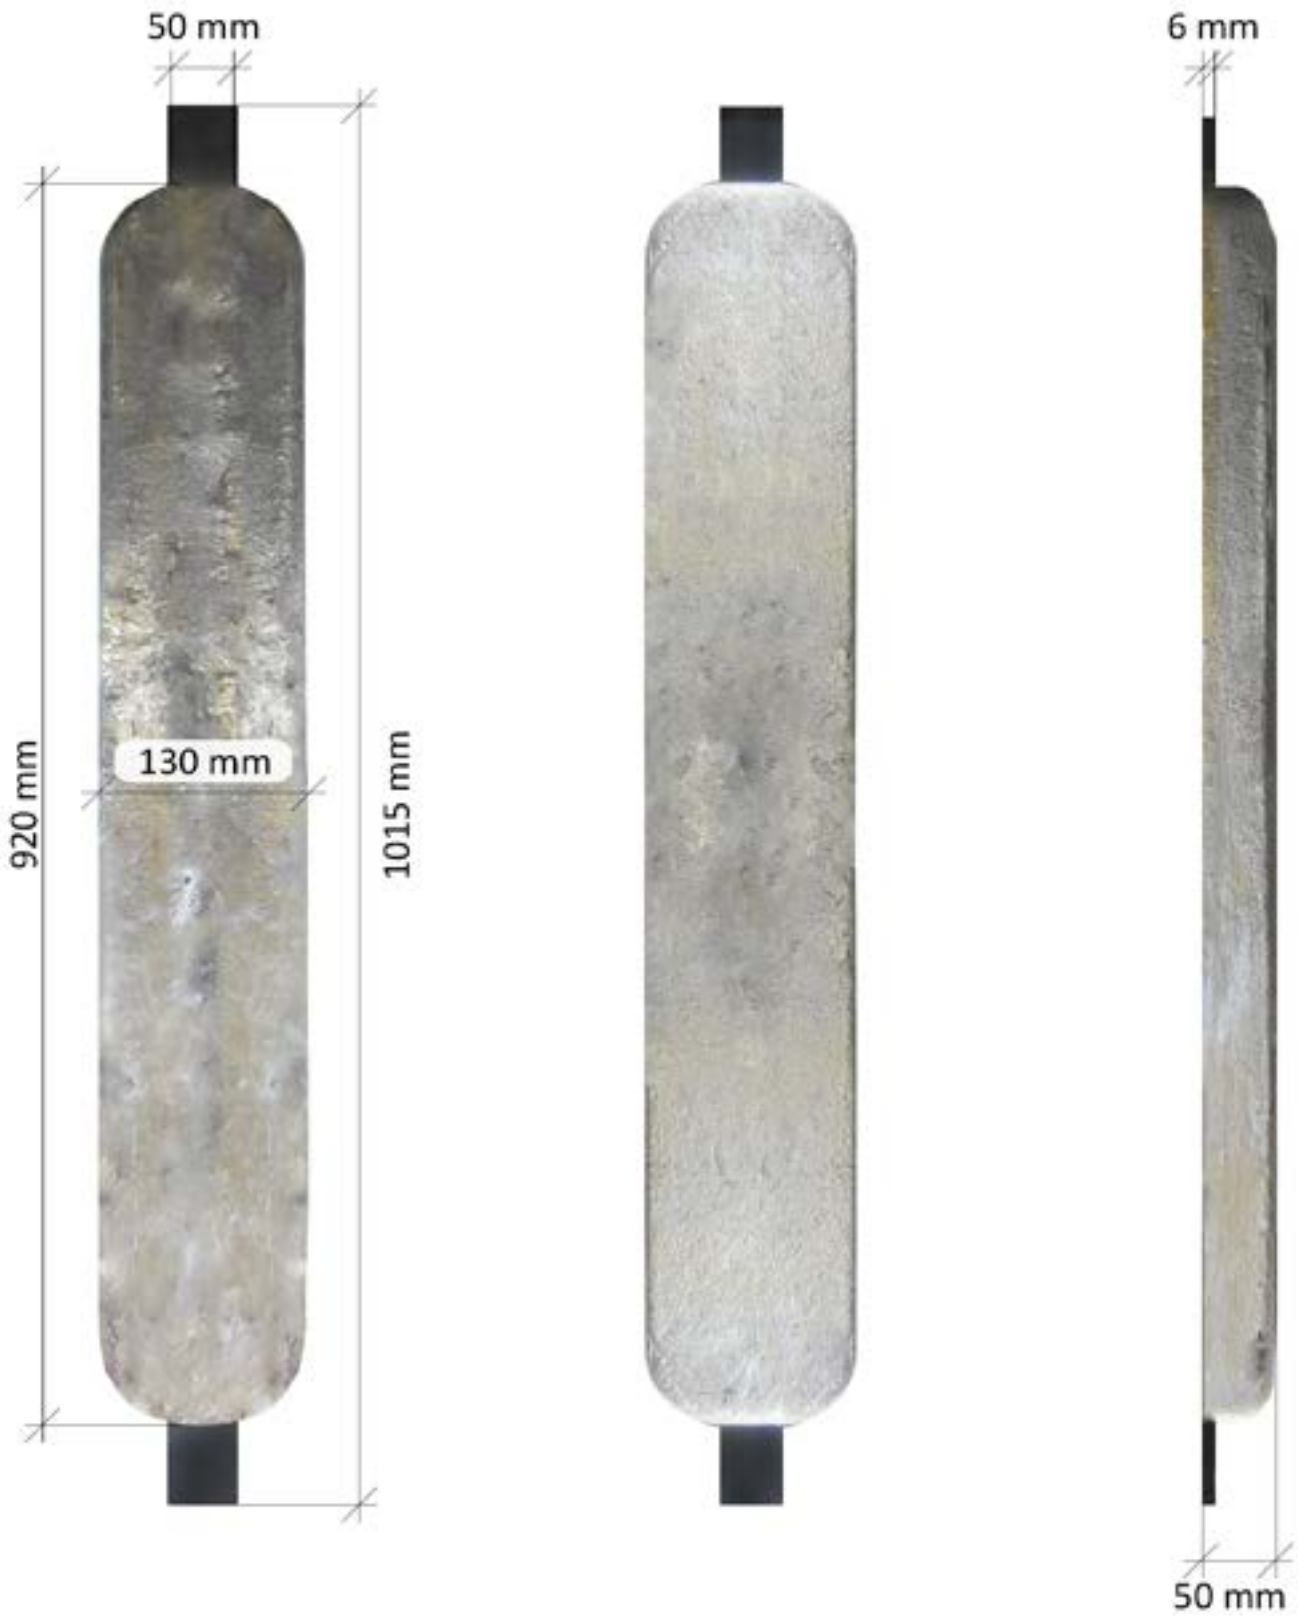


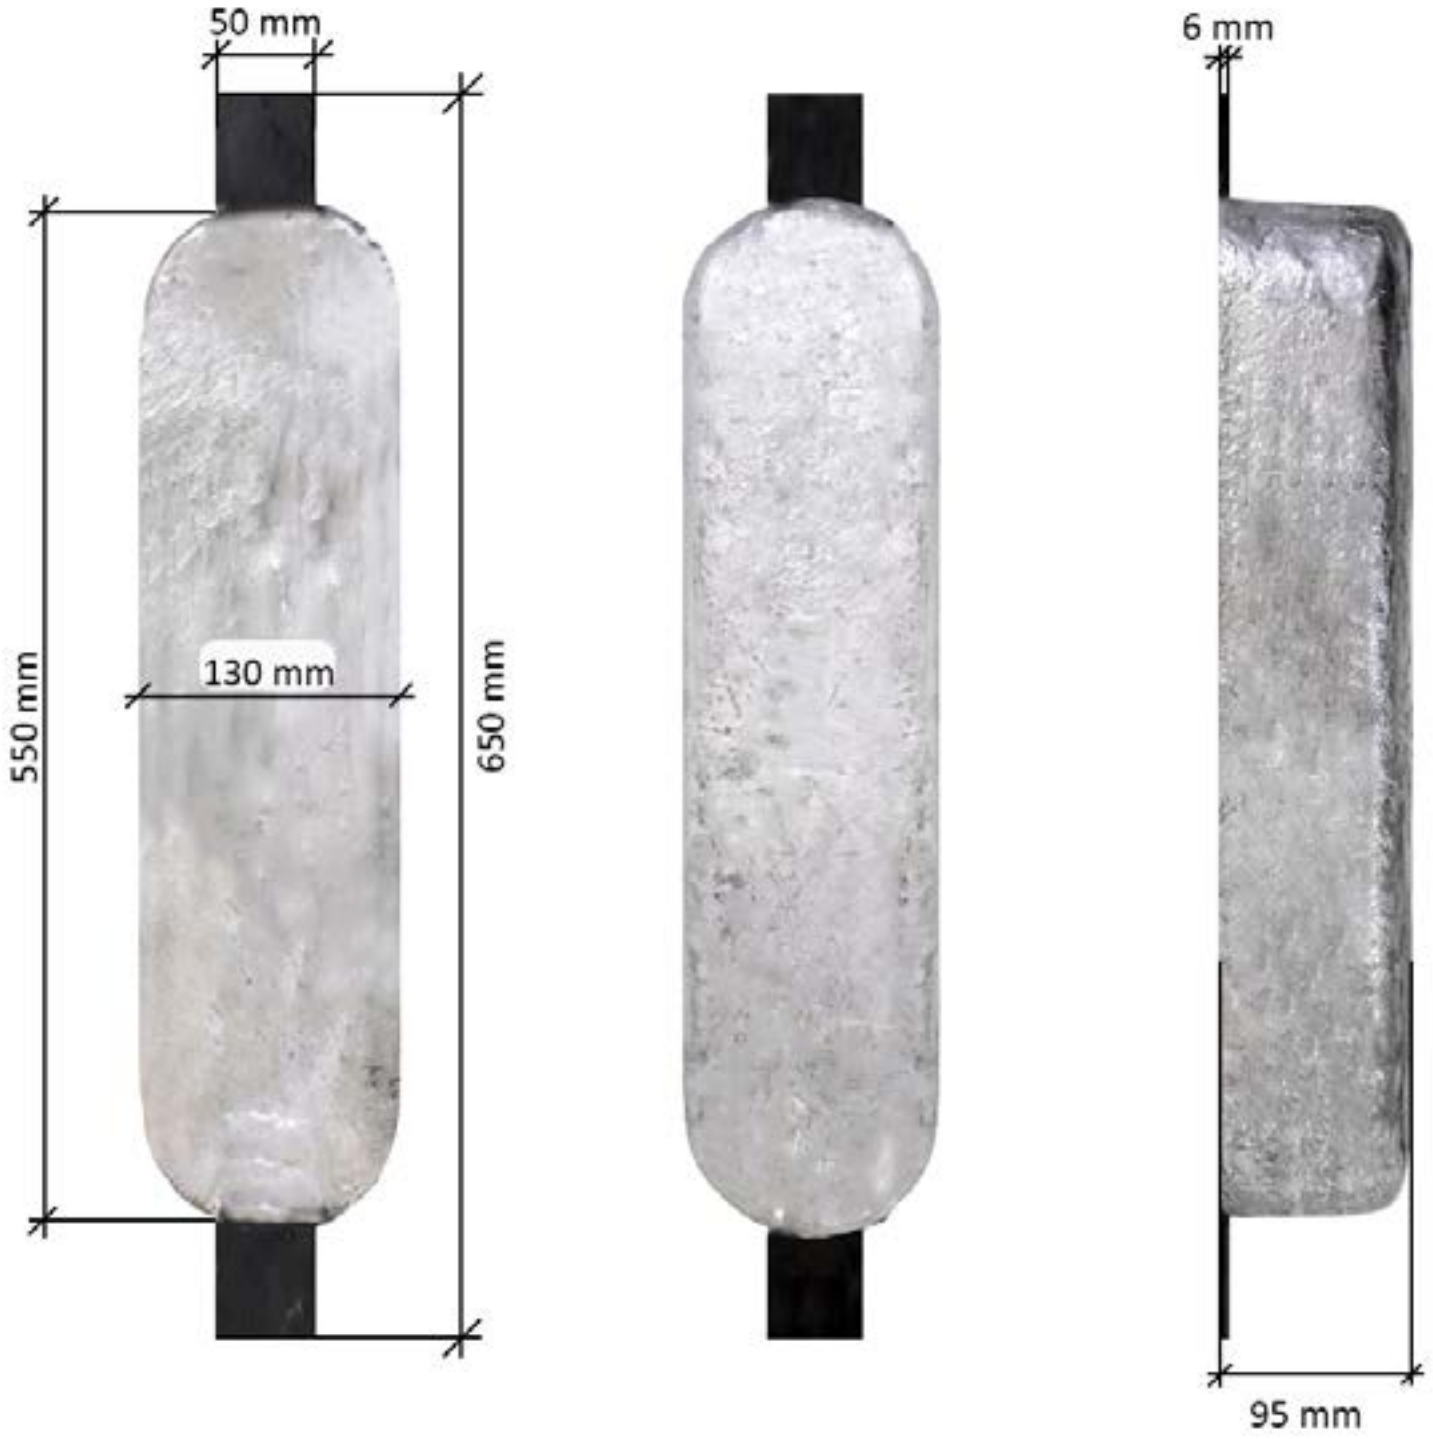

Type	Weight
W126	23,40 Kg

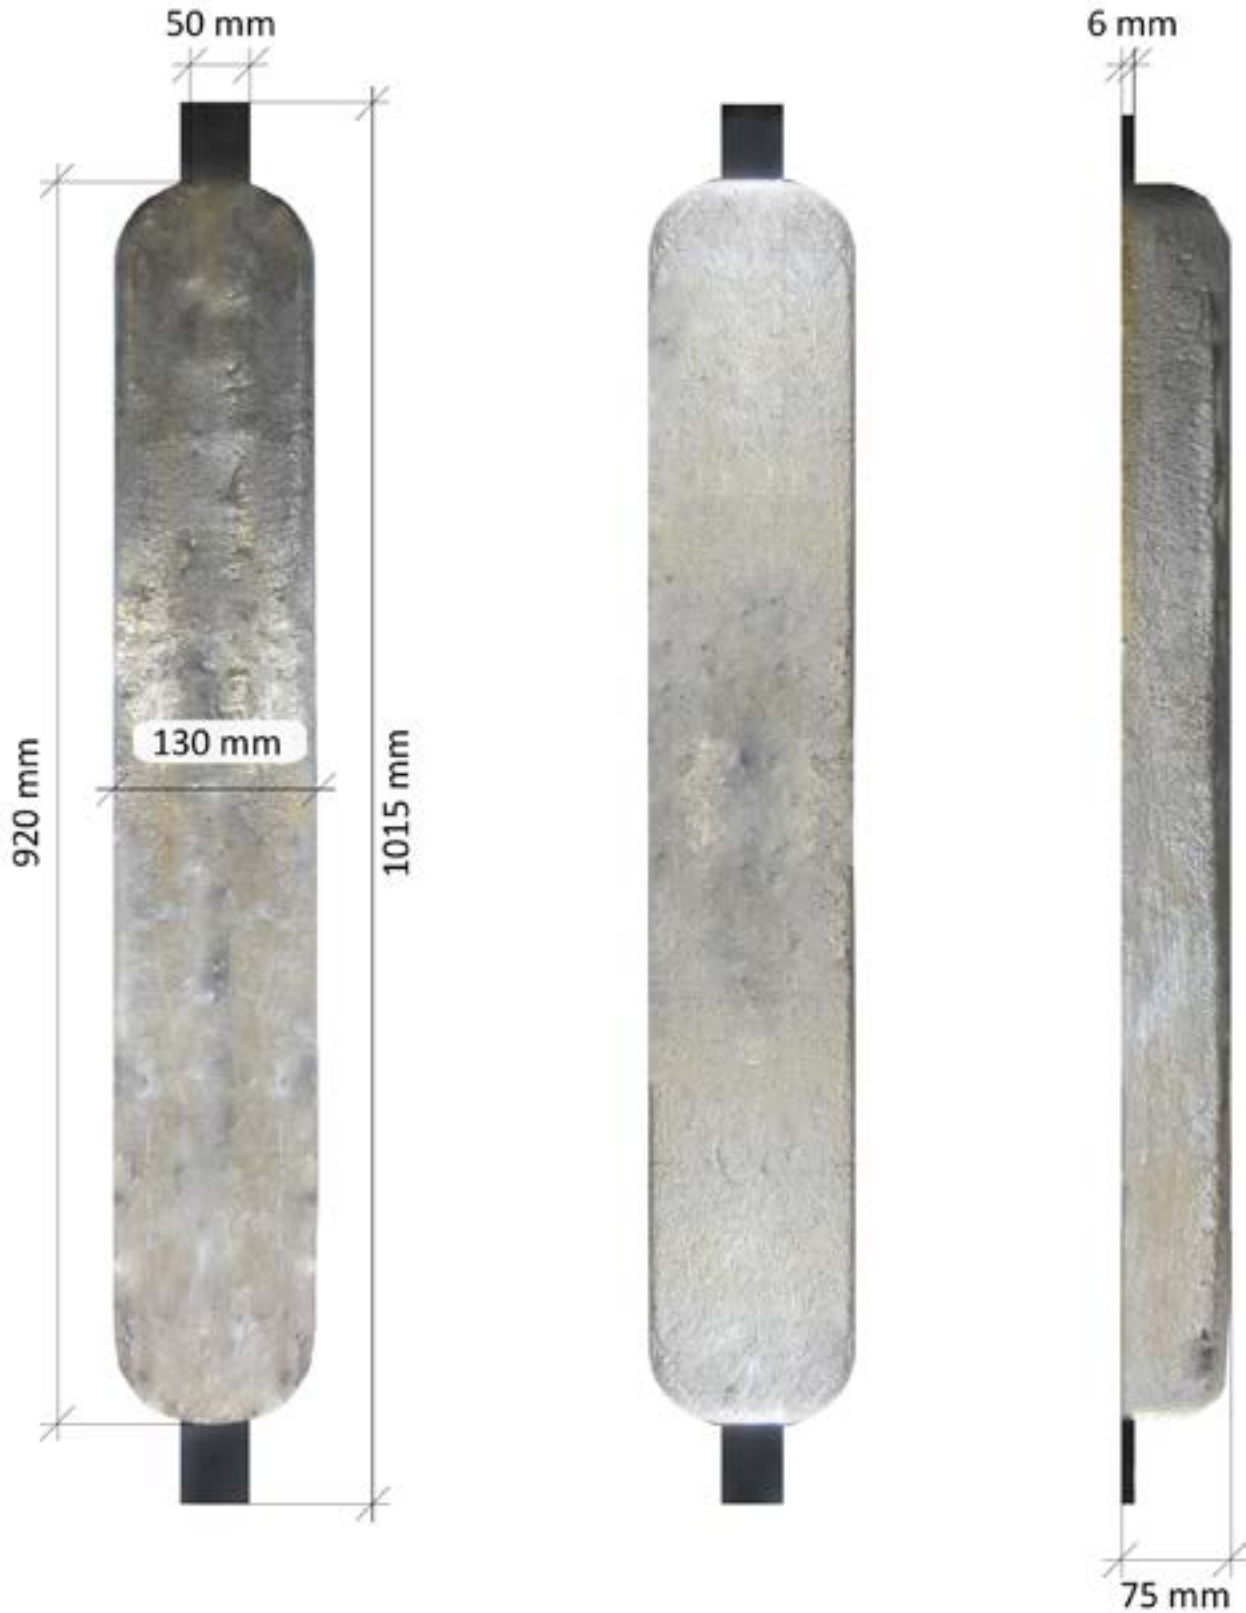


Type	Weight
N50AT	5,00 Kg
N80AT	8,00 Kg
N110AT	11,00 Kg

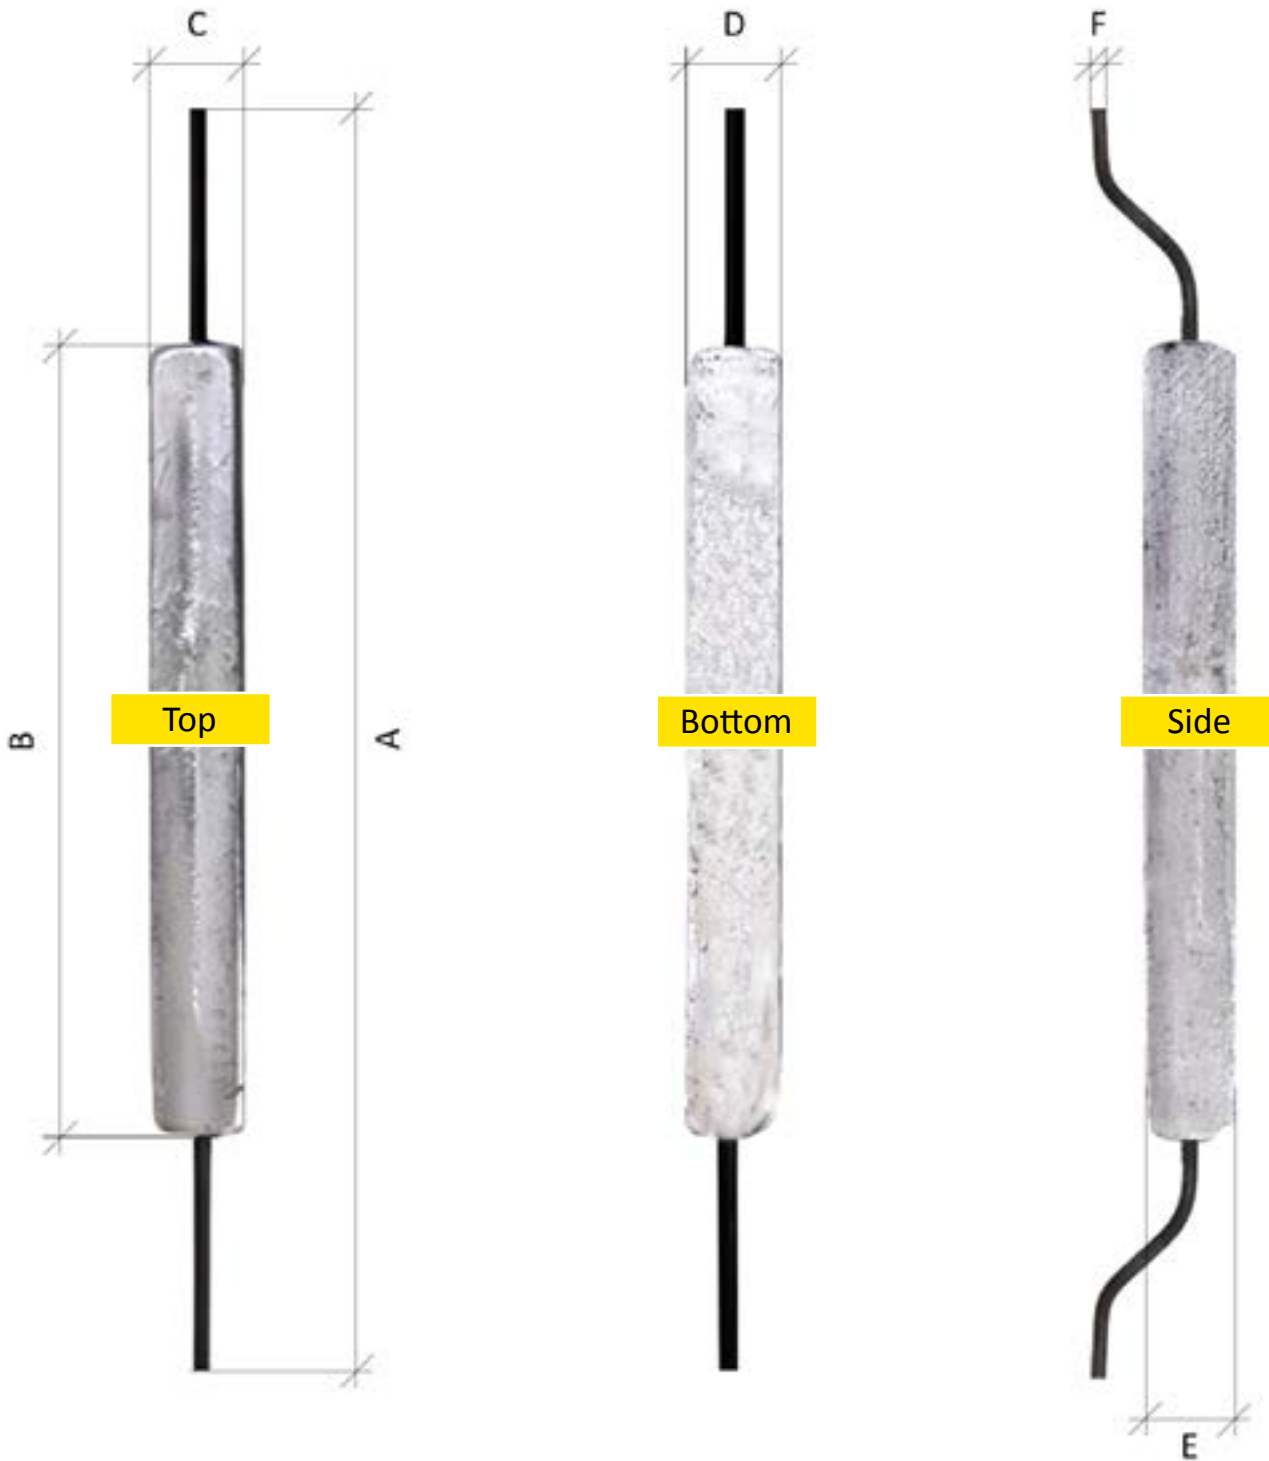

Model	A	B	C	D	E	F
N50AT	900 mm	500 mm	60 mm	50 mm	60 mm	Ø 14 mm
N80AT	1050 mm	610 mm	76 mm		70 mm	
N110AT	1300 mm	830 mm	76 mm		75 mm	

Type	Weight
B4	1,80 Kg
B9E	4,60 Kg
B9F	5,50 Kg
B12F	7,50 Kg
B12G	10,70 Kg

*Rubber Backing sold separately

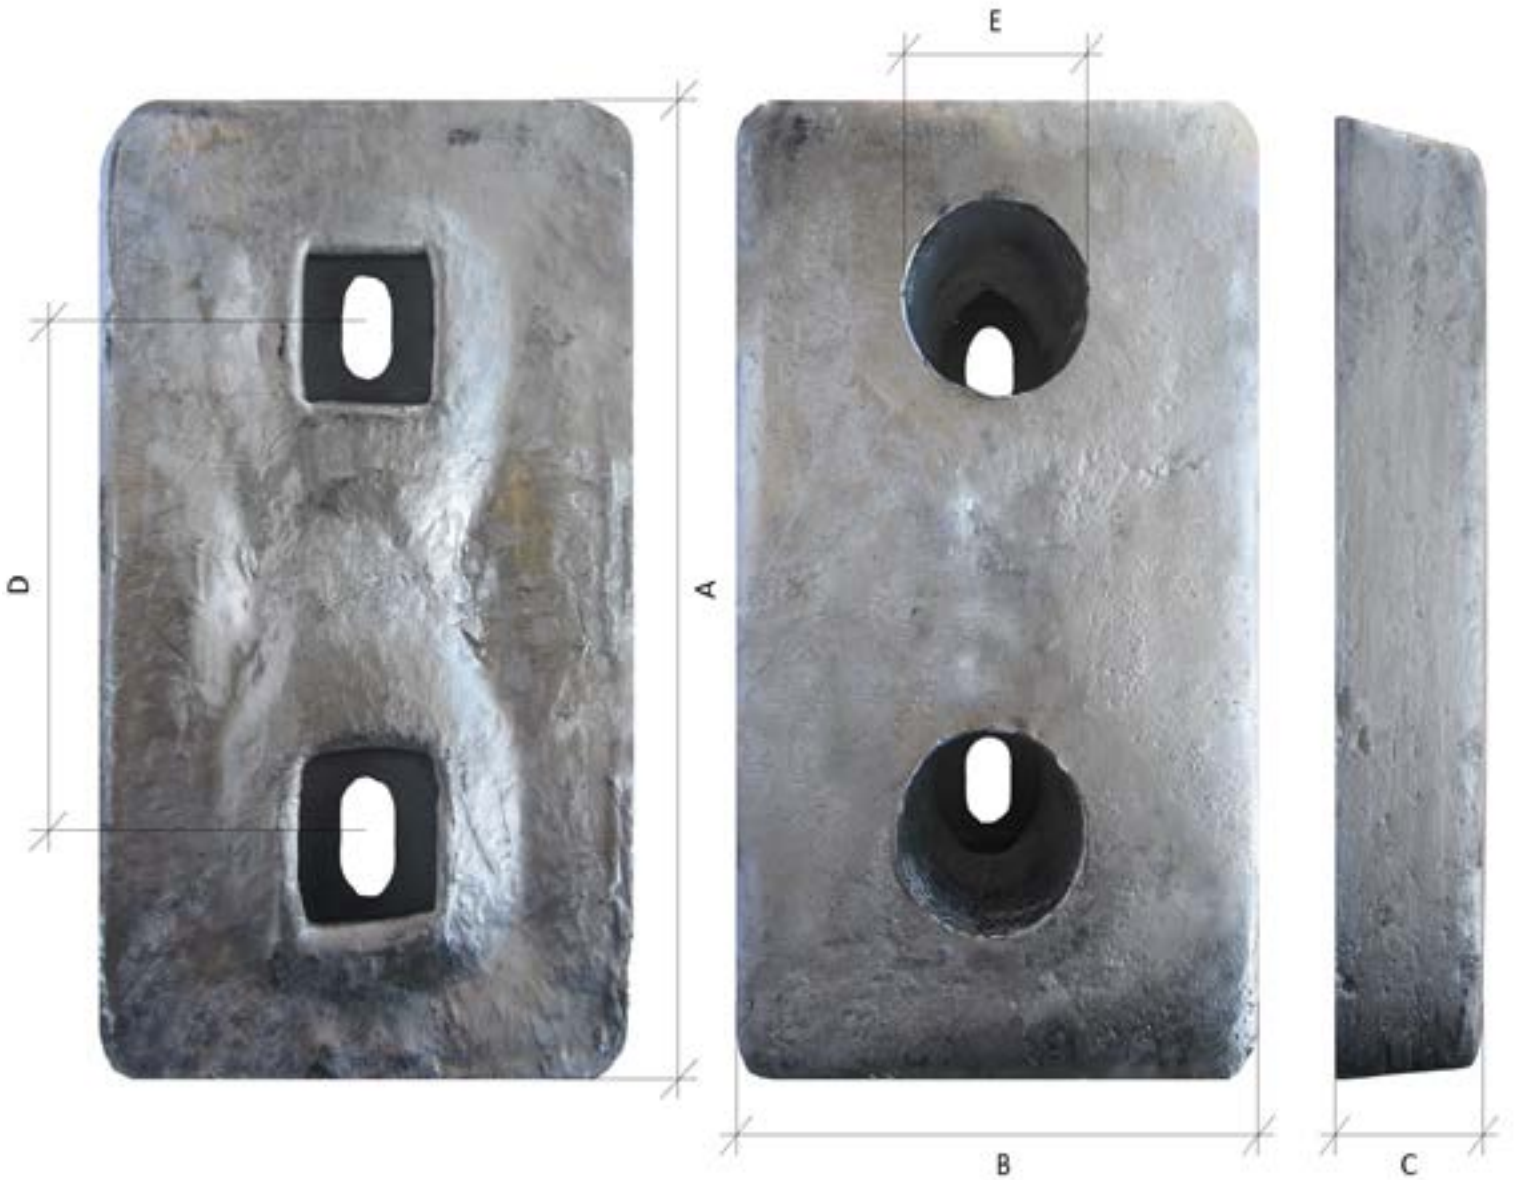

Model	A	B	C	D	E
B4	200 mm	100 mm	40 mm	110 mm	50 mm
B9E	300 mm	150 mm	40 mm	160 mm	50 mm
B9F	300 mm	150 mm	50 mm	160 mm	50 mm
B12F	300 mm	200 mm	50 mm	160 mm	50 mm
B12G	300 mm	200 mm	65 mm	160 mm	50 mm

Length and diameters to be determined by client





According to MIL-DTL-24779A

www.zinc-it.eu